

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ :

E02B 17/02, 17/06, 17/08

A1

(11) International Publication Number:

WO 00/24972

(43) International Publication Date:

4 May 2000 (04.05.00)

(21) International Application Number: PCT/GB99/03521

(22) International Filing Date: 25 October 1999 (25.10.99)

(30) Priority Data:
9823427.1 26 October 1998 (26.10.98) GB

(71) Applicant (for all designated States except US): OVE ARUP
PARTNERSHIP LIMITED [GB/GB]; 13 Fitzroy Street,
London W1P 6BQ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): COLLIER, David
[GB/GB]; 13 Fitzroy Street, London W1P 6BQ (GB).
JACKSON, Gordon [GB/GB]; 13 Fitzroy Street, London
W1P 6BQ (GB). ROBERTS, John [GB/GB]; 13 Fitzroy
Street, London W1P 6BQ (GB).


(74) Agents: LECKEY, D., H. et al.; Frank B. Dehn & Co., 179
Queen Victoria Street, London EC4V 4EL (GB).

(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU,
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ
(Utility model), DE, DE (Utility model), DK, DK (Utility
model), DM, EE, EE (Utility model), ES, FI, FI (Utility
model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS,
JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,
MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO,
RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO
patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF,
BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN,
TD, TG).

Published

With international search report.

(54) Title: OFFSHORE STRUCTURE

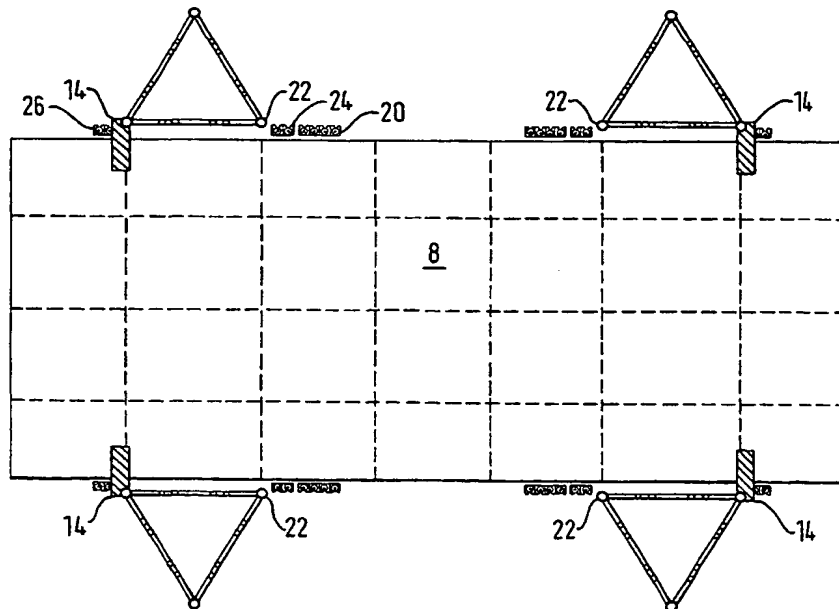

(57) Abstract

The present invention provides an offshore structure (2) comprising a base (4), a deck (8), and a plurality of lattice legs (6) extending between the base and the deck, wherein the legs are arranged outboard of the deck and a connection is provided between an inwardly facing face of each said leg and the deck.

Sub
A1